






8"x8" Branche Decor in Mer

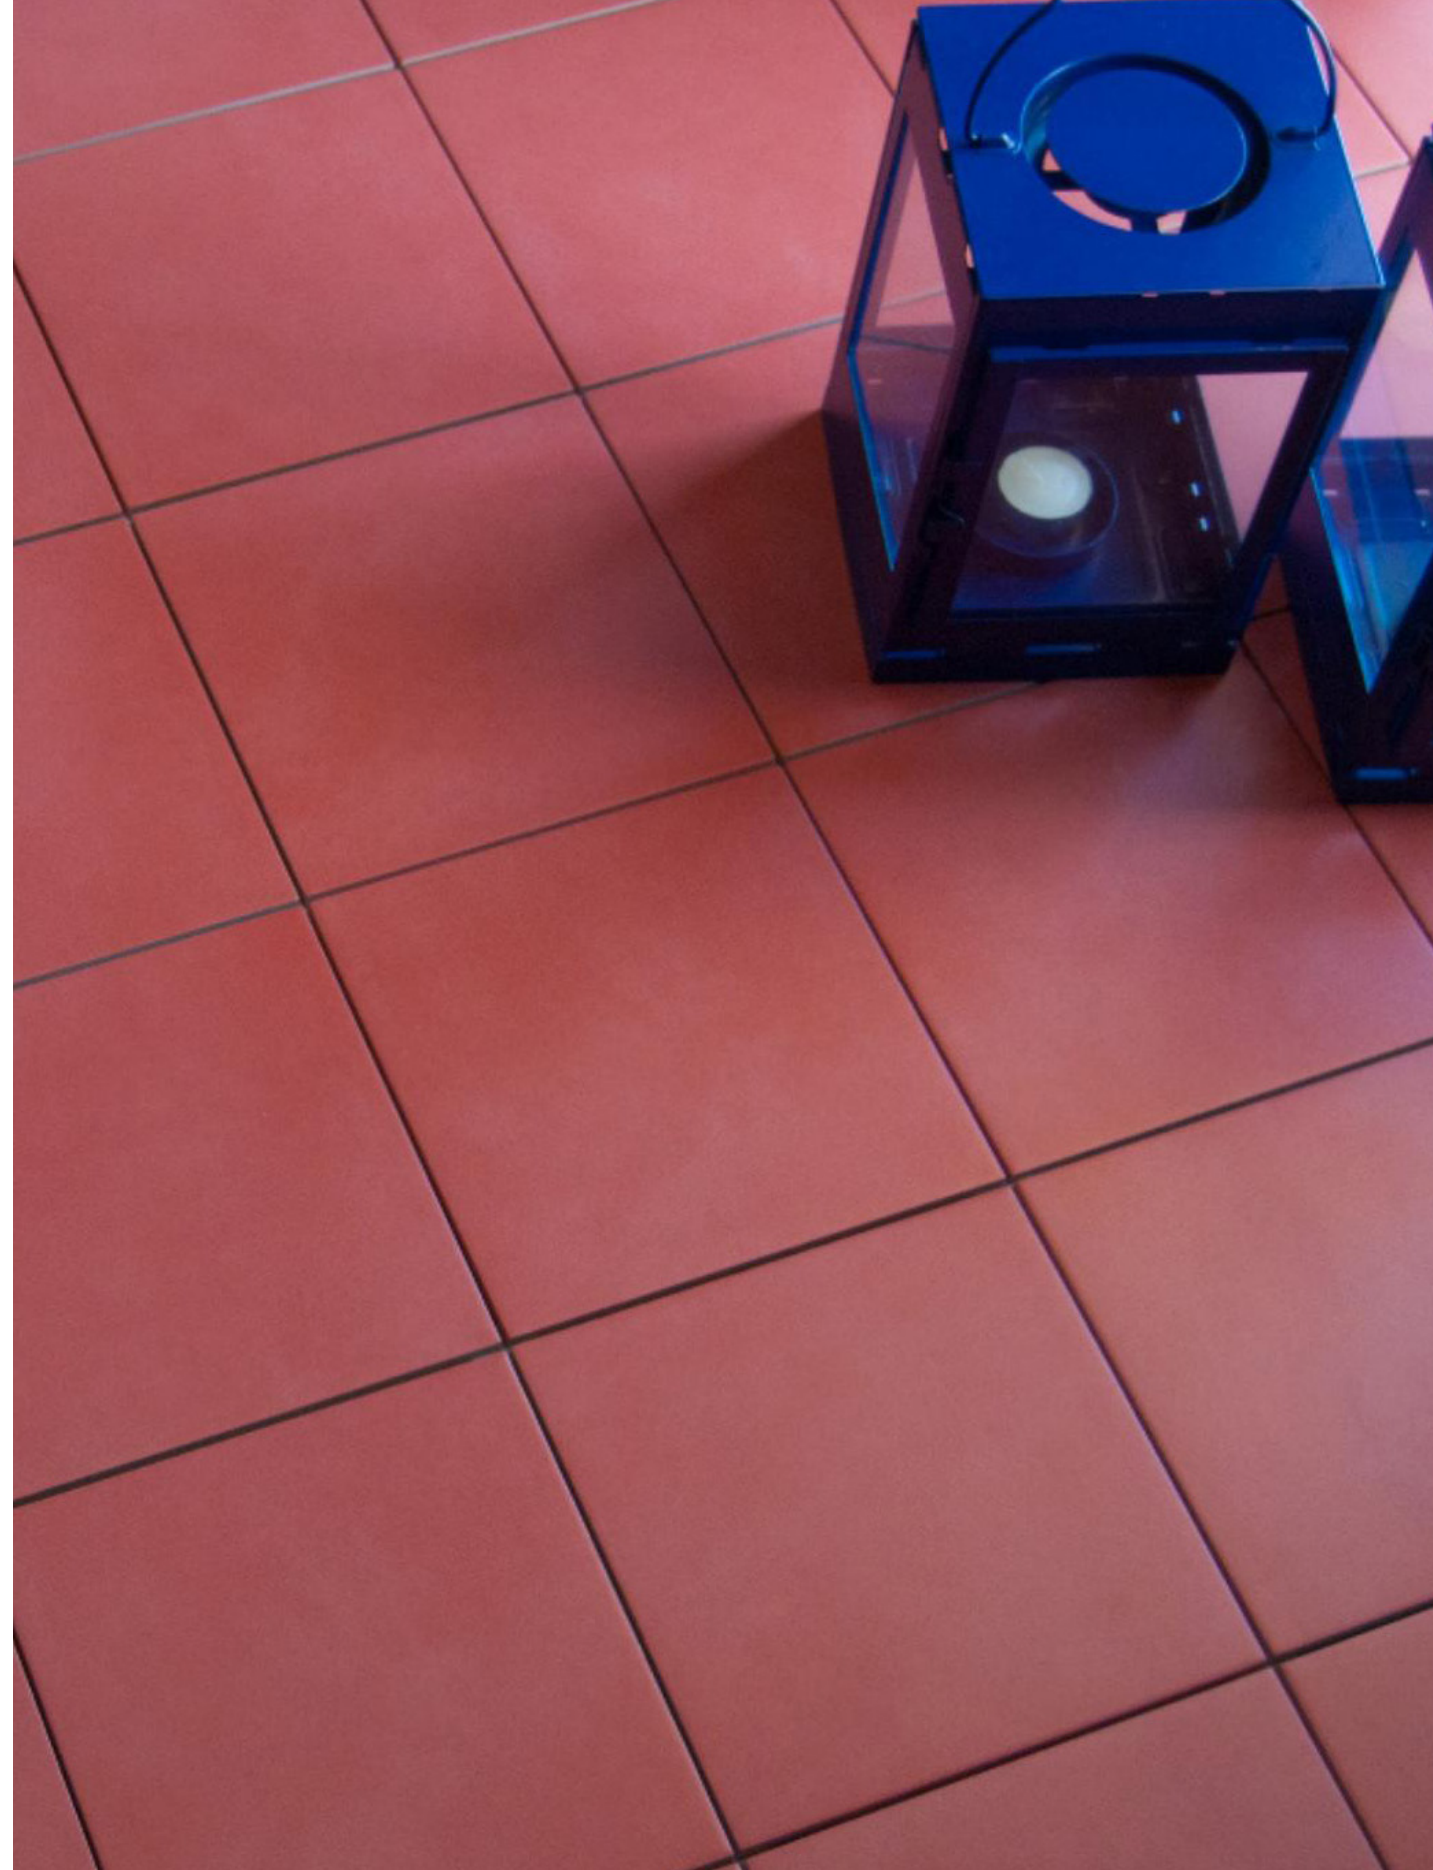

8"x8" Field Tile in Framboise



8"x8" Field Tile in Ciel
8"x8" Fleur Decor in Ciel



8"x8" Field Tile



8"x8" Optique Decor in Titane



8"x8" Classic B in Noir

AVAILABLE IN:

Field Tile

8"x8" *Natural Finish*

Decor Tile *Comes individually

8"x8" Branche in Mer *Natural Finish*

8"x8" Fleur in Ciel *Natural Finish*

8"x8" Optique in Titane *Natural Finish*

8"x8" Classic B in Noir *Natural Finish*

8"x8" Classic B Listel in Noir *Natural Finish*


8"x8" Classic B Corner in Noir *Natural Finish*

Decor Tile *Comes in a random pattern


8"x8" Patchwork *Natural Finish*




8"x8" Patchwork Decor




Framboise




Abricot




Mangué



Lave



Olive



Mer




Ciel



Azur




Graphite



Titane



Salt



Nuage



Neige



Blanc Pur



Lin




Champagne


8"X8" DECOR TILE




Branche in Mer




Fleur in Ciel



Optique in Titane



Classic B in Noir





Classic B Listel in Noir



Classic B Corner in Noir

8"X8" PATCHWORK DECOR



Characteristics	Test Method	Prescribed Value	Our values
Length and Width	EN ISO 10545-2	±0,6% max. 2mm	guaranteed
Thickness		±5% max. 0,5mm	guaranteed
Side Straightness		±0,5% max. 1,5mm	guaranteed
Rectangularity		± 0,5% max. 2,0mm	guaranteed
Flatness		± 0,5% max. 2,0mm	guaranteed
Water Absorption	EN ISO 10545-3	E ≤ 0,5%	E ≤ 0,2%
Modulus of Rupture	EN ISO 10545-4	≥ 35 N/mm ²	≥ 35 N/mm ²
Breaking Strength		≥ 1.300 N	≥ 1.300 N
Abrasion Resistance	EN ISO 10545-7	as per manufacturer	upon request
Coefficient of Linear Thermal Expansion	EN ISO 10545-8	as per manufacturer	75x10 ⁻⁷ °C ⁻¹ maximum value
Thermal Shock Resistance	EN ISO 10545-9	required	guaranteed
Crazing Resistance	EN ISO 10545-11	required	guaranteed
Frost Resistance	EN ISO 10545-12	required	guaranteed
Resistance Against Acids and Alkalis	EN ISO 10545-13	as per manufacturer	class GLA
Resistance to Household Cleaning Products		minimum: class GB	class GA
Resistance to Staining	EN ISO 10545-14	minimum: class 3	class 4
Slip Resistance	DIN 51130:2009 DIN 51097:1992	as per manufacturer	upon request
Product Thickness			10 mm

Product Info:

- Porcelain Tile
- Natural Finish
- Frost Resistance = Yes
- Contact your sales representative for more information





www.genrose.com